


AXOR Citterio
Thermostat HighFlow for concealed installation with lever handle
 Finish: **Chrome** Article Number: **39711000**




product features

- T42K
- maximum flow rate at 3 bar: 59 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- with silencer
- connection type: basic set

Product image

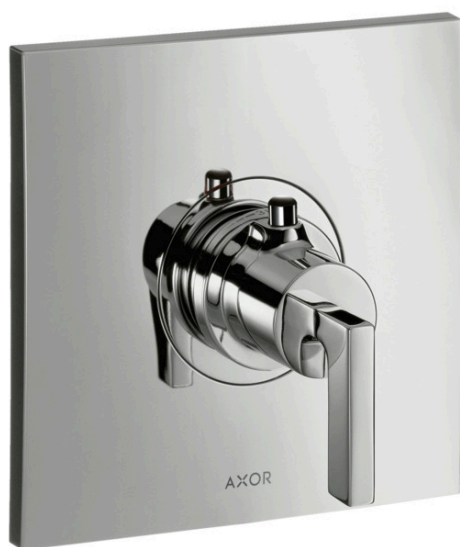


Scale drawing

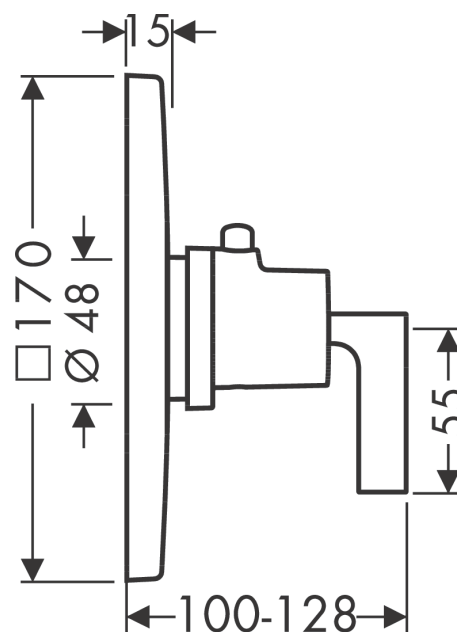

AXOR Citterio
Thermostat HighFlow for concealed installation with lever handle
 Finish: **Chrome** Article Number: **39711000**



Flowchart

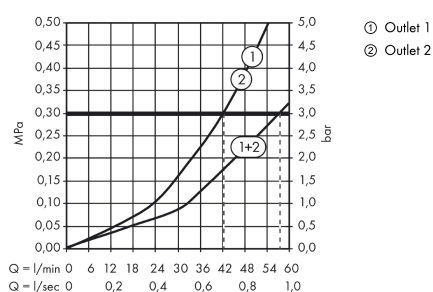


AXOR Citterio
Thermostat HighFlow for concealed installation with lever handle
 Finish: **Chrome** Article Number: **39711000**



Exploded Drawing

Year of production: >02/12

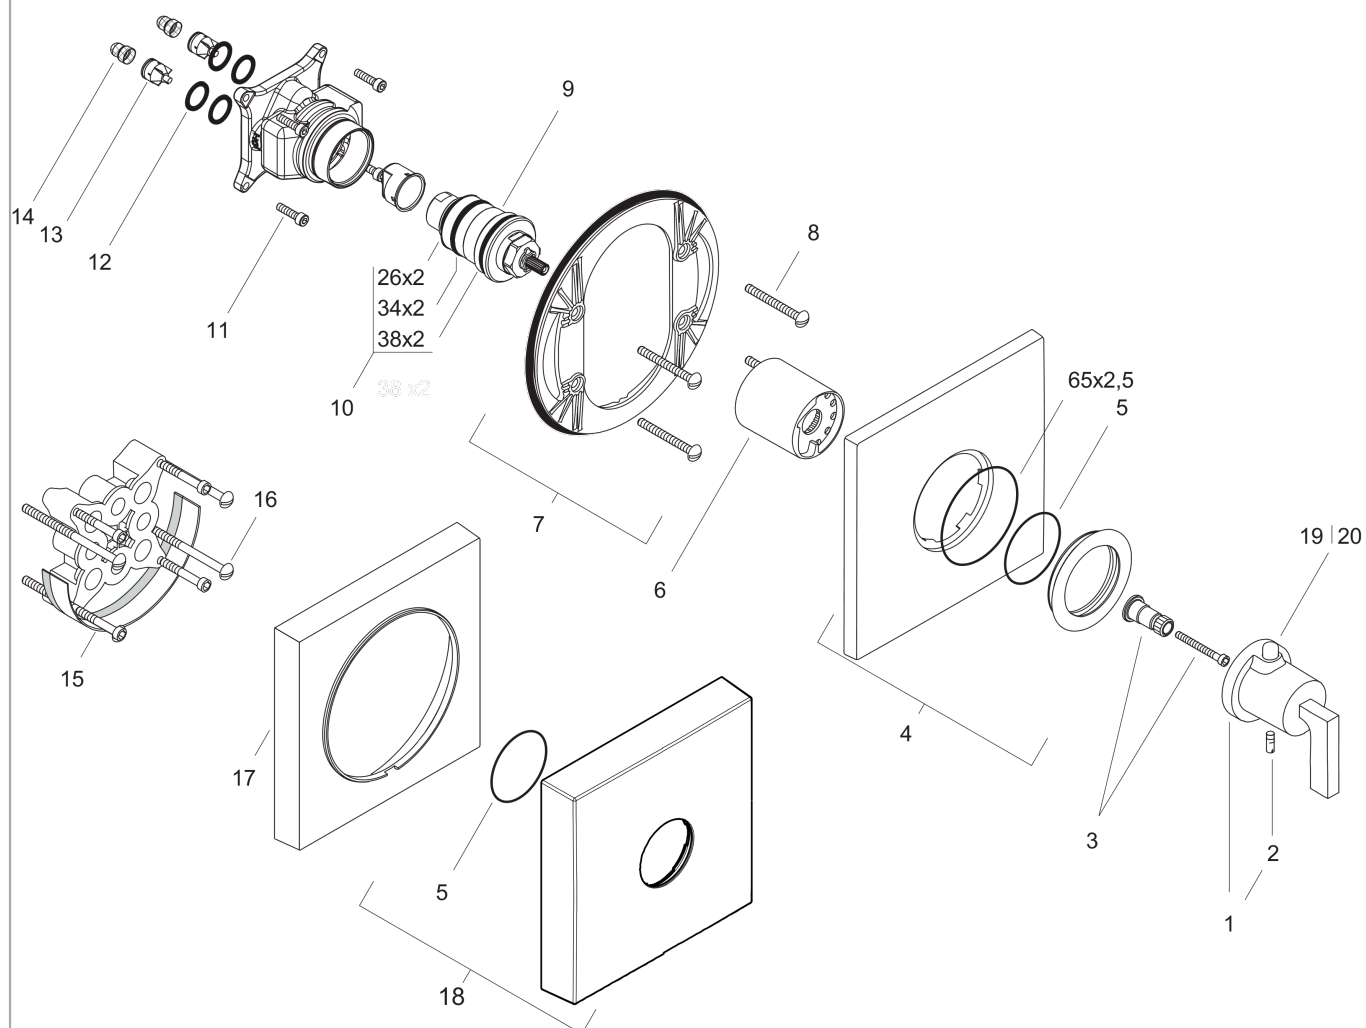

AXOR Citterio
Thermostat HighFlow for concealed installation with lever handle
 Finish: **Chrome** Article Number: **39711000**



Spare part list

Year of production: >02/12

Pos.		Article Number	PC	PU
1	handle for thermostat	39994000	12	1
2	hollow set screw M5x16	97666000	1	1
3	adapter for handle	96435000	6	1
4	escutcheon	96750000	12	1
5	O-Ring 48x3	95508000	1	1
6	sleeve	97439000	9	1
7	holder for escutcheon	98793000	9	1
8	set of fixing screws	96454000	3	1
9	thermostat cartridge	96633000	15	1
10	sealing set	96636000	10	1
11	set of screws	96525000	3	1
12	O-ring 16x2	98133000	1	1
13	set of non return valves DW 15	97350000	6	1
14	filter	98513000	1	1
15	extension 25 mm	13595000	99	1
16	set of fixing screws	97747000	1	1
17	extension 22 mm	97407000	99	1
18	escutcheon height = 33 mm (when wall is not deep enough).	14964000	99	1
19	pushbutton	97792000	5	1
20	pushbutton red	97212000	7	1
a	concealed item	01800180	99	1
b	adapter for exchanged connections	93181000	18	1