

**AXOR Starck**  
**Thermostat HighFlow for concealed installation**  
 Finish: **Chrome** Article Number: **10715000**




## product features

- T42
- maximum flow rate at 3 bar: 59 l/min
- flow rate upper outlet: 42 l/min
- flow rate lower outlet: 42 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- connection type: basic set

## Product image




## Scale drawing

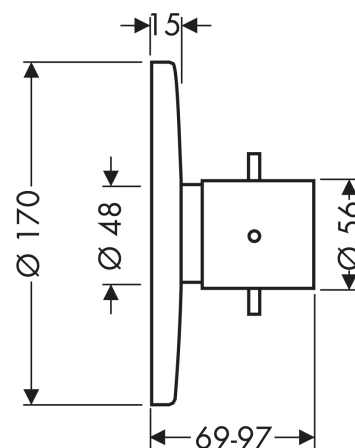

**AXOR Starck**  
**Thermostat HighFlow for concealed installation**  
 Finish: **Chrome**    Article Number: **10715000**



## Flowchart

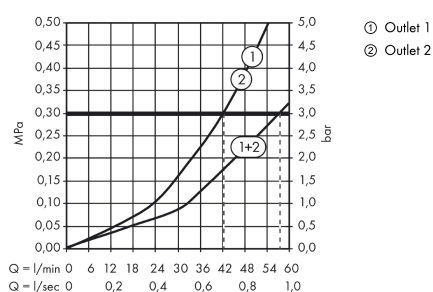


**AXOR Starck**  
**Thermostat HighFlow for concealed installation**  
 Finish: **Chrome** Article Number: **10715000**



## Exploded Drawing

Year of production: >02/12

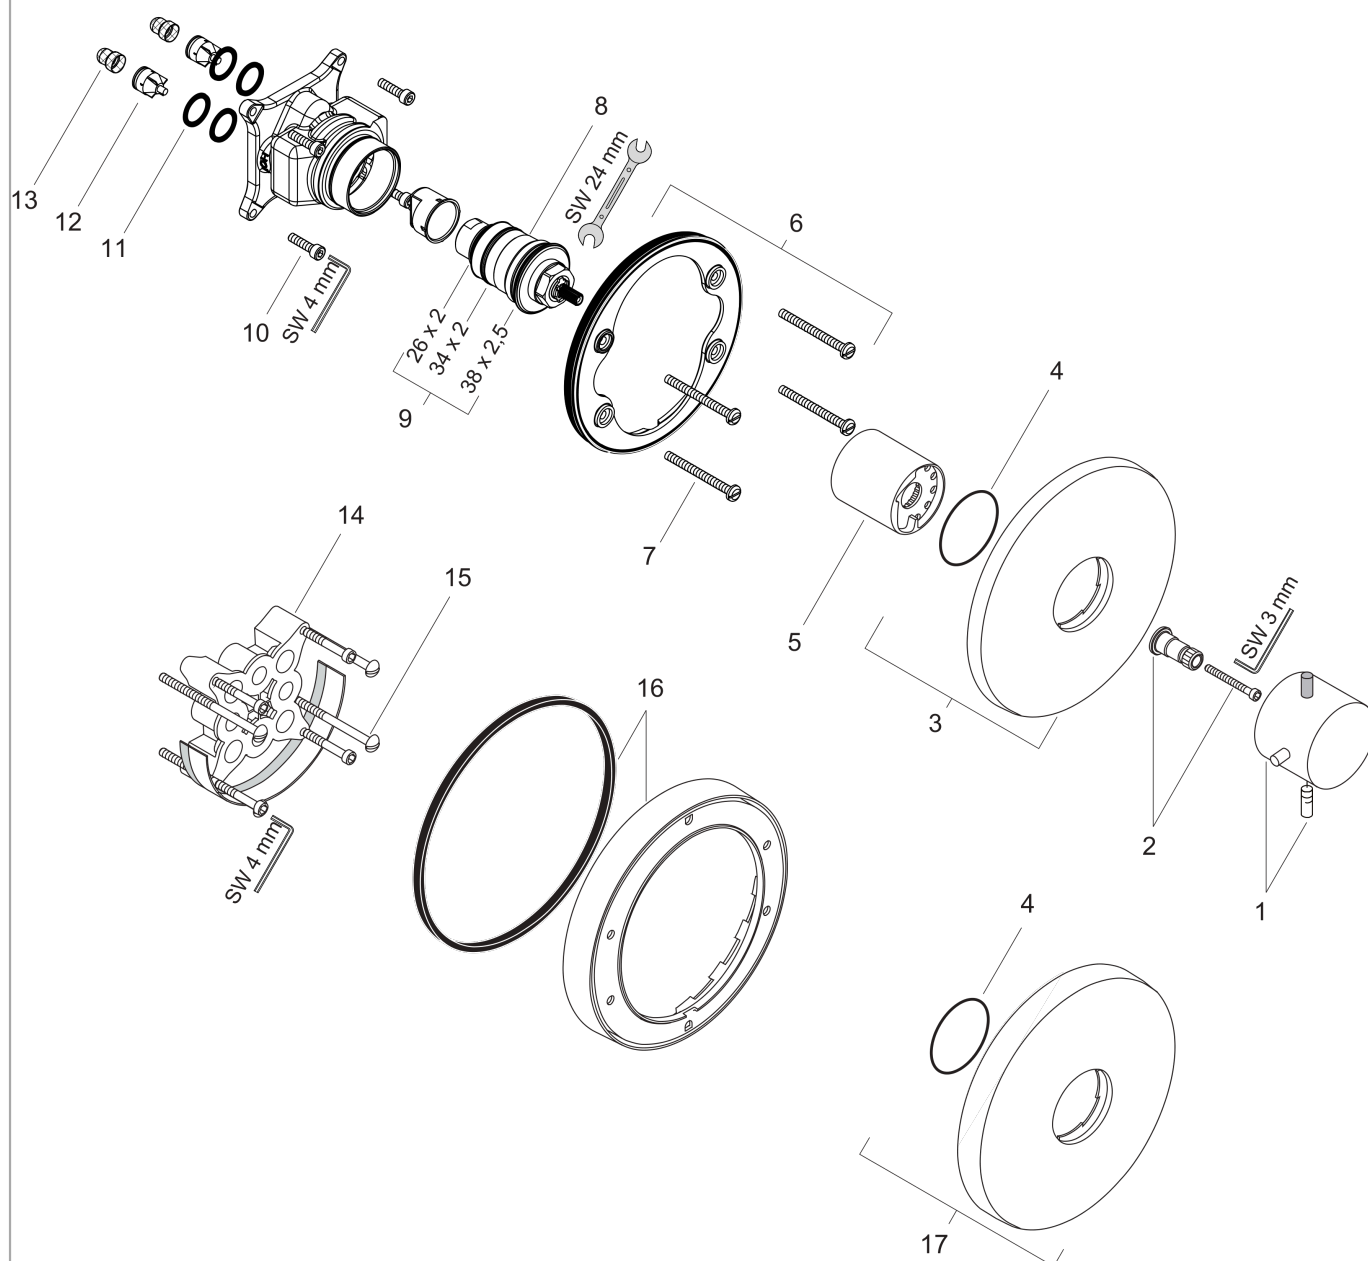

**AXOR Starck**  
**Thermostat HighFlow for concealed installation**  
 Finish: **Chrome**    Article Number: **10715000**



## Spare part list

Year of production: >02/12

Pos.		Article Number	PC	PU
1	handle for thermostat	10391000	14	1
2	adapter for handle	96435000	6	1
3	escutcheon Ø 170 mm	95803000	15	1
4	O-Ring 48x3	95508000	1	1
5	sleeve	97439000	9	1
6	sub plate	96447000	10	1
7	set of fixing screws	96454000	3	1
8	thermostat cartridge	96633000	15	1
9	sealing set	96636000	10	1
10	set of screws	96525000	3	1
11	O-ring 16x2	98133000	1	1
12	set of non return valves DW 15	97350000	6	1
13	filter	98513000	1	1
14	extension 25 mm	13595000	99	1
15	set of fixing screws	97747000	1	1
16	extension 22 mm (Ø 170 mm)	13596000	99	1
17	escutcheon height = 33 mm (when wall is not deep enough).	14960000	99	1
a	concealed item	01800180	99	1
b	adapter for exchanged connections	93181000	18	1
c	filter	97367000	3	1