



HANSABASIC

Installation and maintenance guide



4-9



10,12,
13




11-12



14-19



20



21




22



5545 0103


EN 817
50 - 1000 kPa
0.21 l/s (300 kPa)
max. +80°C

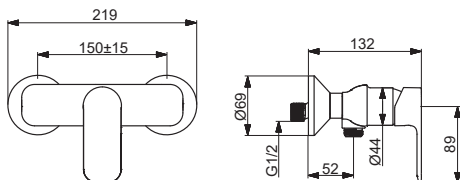

mpi.hansa.com/55450103

5544 2103


EN 817
50 - 1000 kPa
0.36 / 0.22 l/s (300 kPa)
max. +80°C

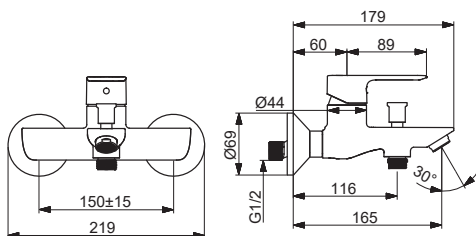

mpi.hansa.com/55442103

5538 0130

EN 1112, 1113
50 - 500 kPa
0.16 / 0.22 l/s (300 kPa)
max. +65°C

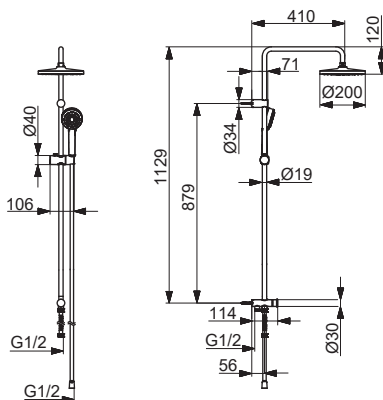

mpi.hansa.com/55380130


5535 0110

EN 1111, EN 1112, EN 1113

100 - 1000 kPa

0.18 / 0.24 l/s (300 kPa)

max. +65°C

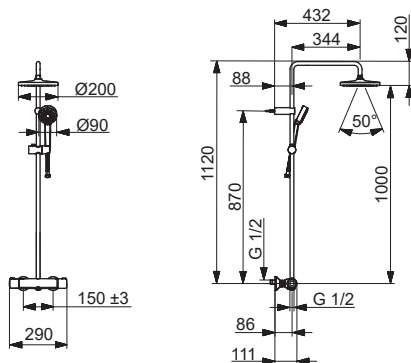

mpi.hansa.com/55350110

5516 2131

II (ISO 3822)


EN 1111

100 - 1000 kPa






0.16 l/s (Eco)







0.34 / 0.19 l/s (300 kPa)

max. +65°C

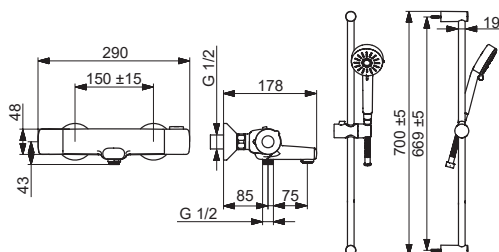

mpi.hansa.com/55162131

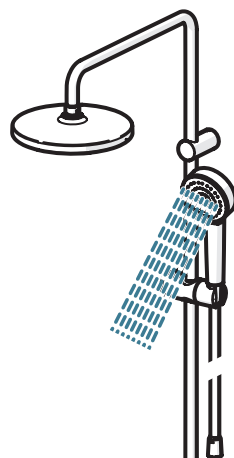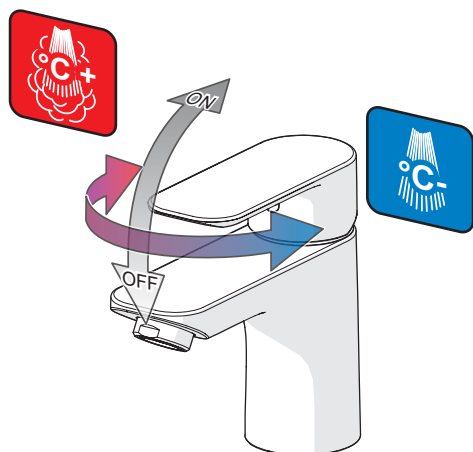

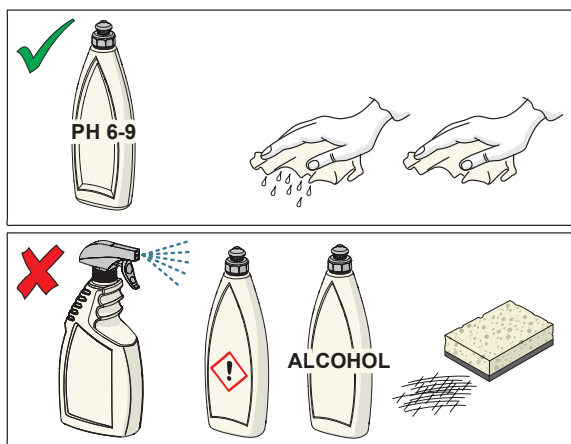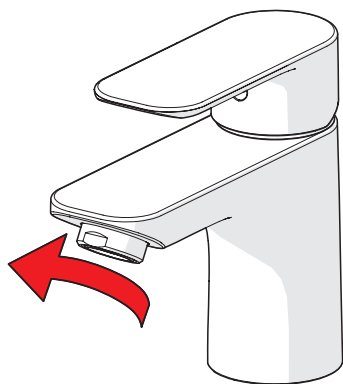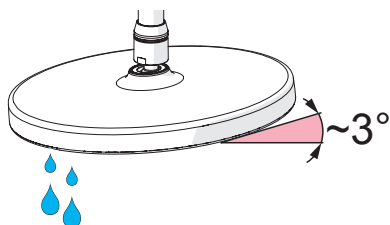

cleaning.hansa.com