



# HANSA



Installation and maintenance guide









**5793 2171 , 5795 2171 ,  
5793 2171 33, 5795 2171 33**



EN 817  
50 - 1000 kPa  
0.13 l/s (300 kPa w/Controller)  
max. +90°C

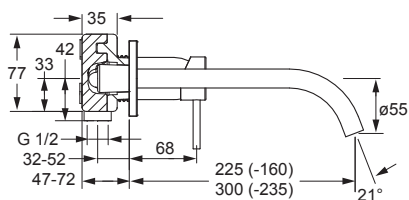

**5794 2171 , 5796 2171**

EN 817  
50 - 1000 kPa  
0.13 l/s (300 kPa)  
max. +90°C

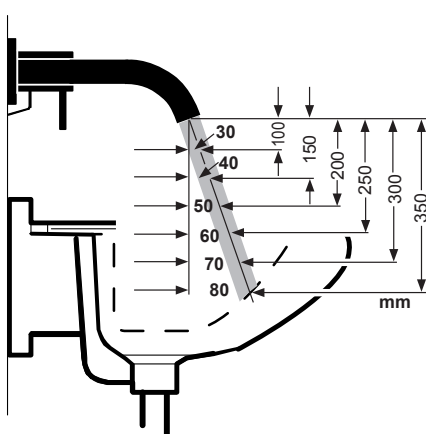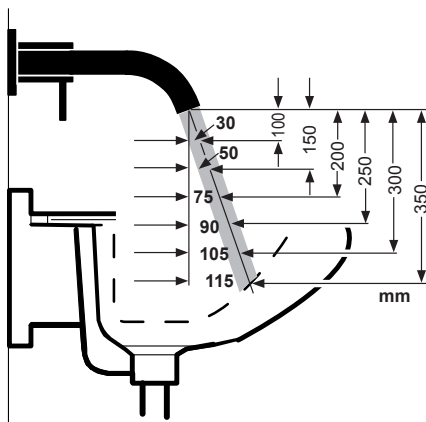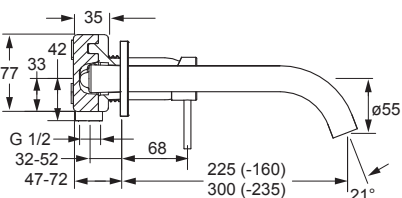

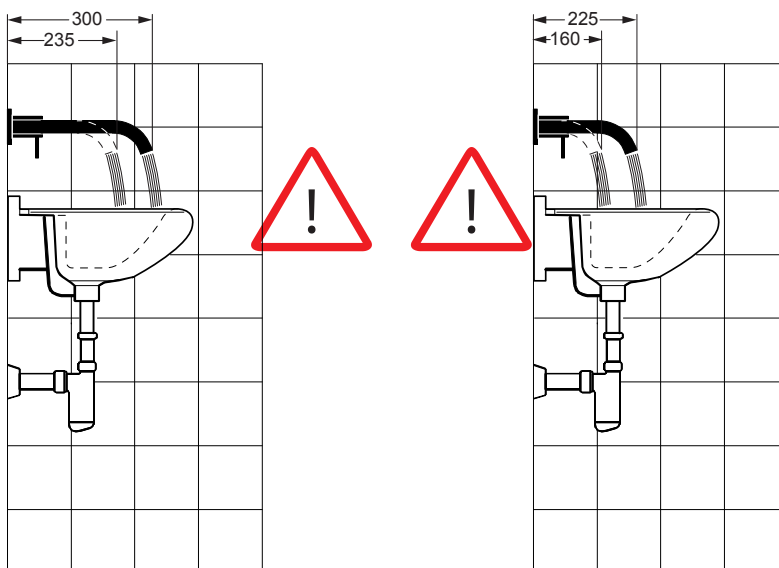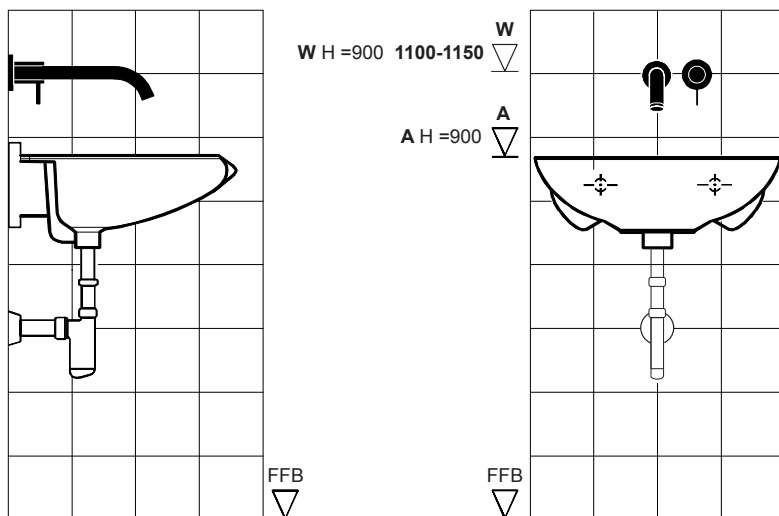




**EN 806**






2.5

④

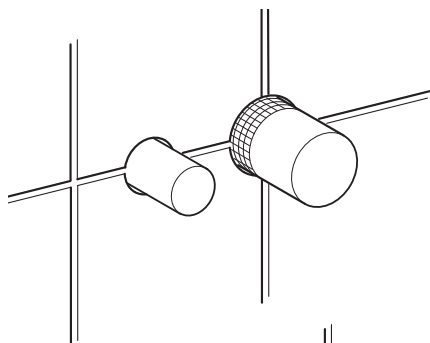

**59 913 136 (+15 mm)**


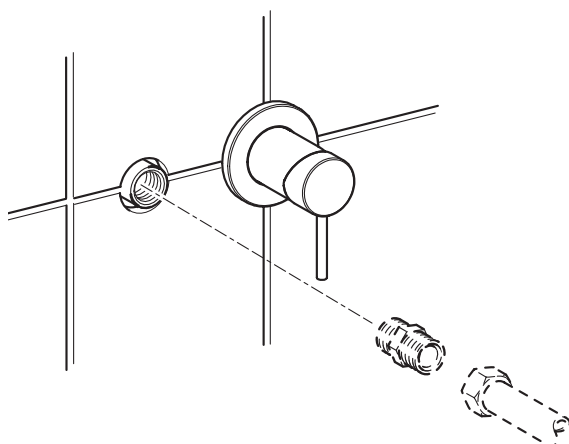
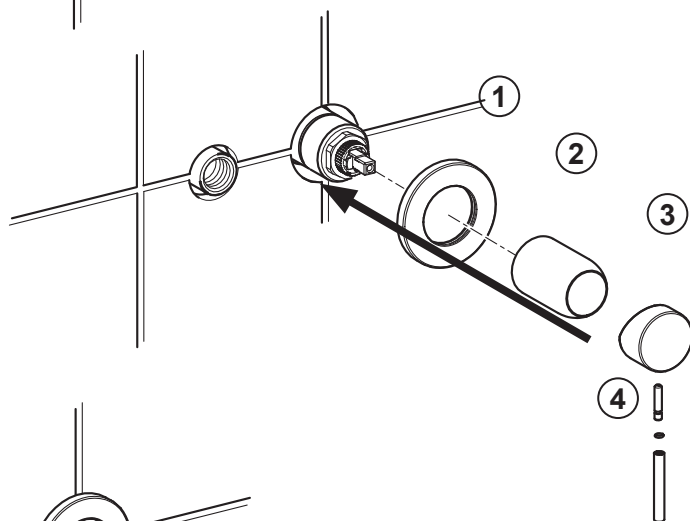




1 A



1 B

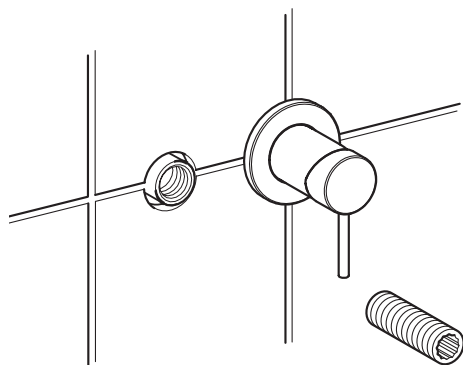

1

A

**5793 2171/ 5795 2171**

B

**5794 2171/ 5796 2171**

