



- [illegible]







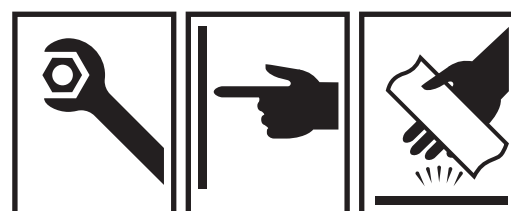


1219 / A 868 653

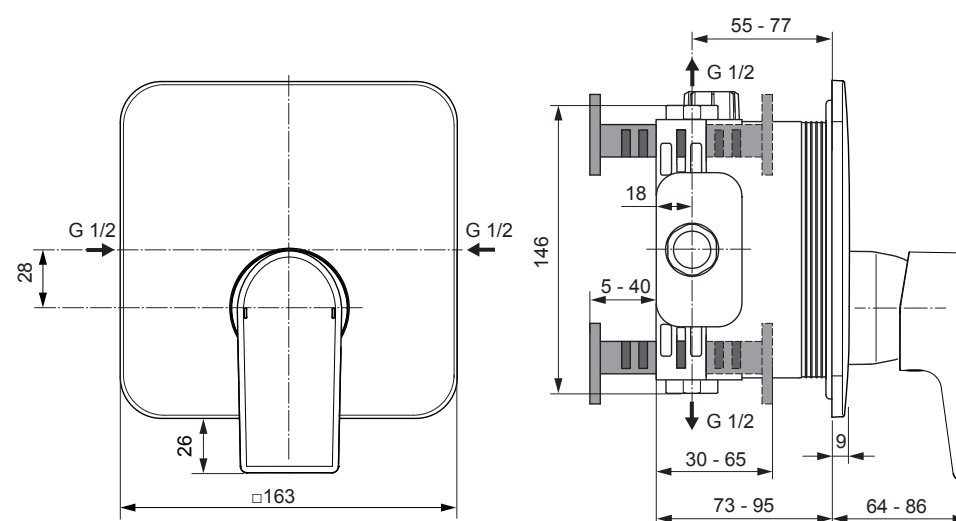

[www.idealstandardinternational.com](http://www.idealstandardinternational.com)



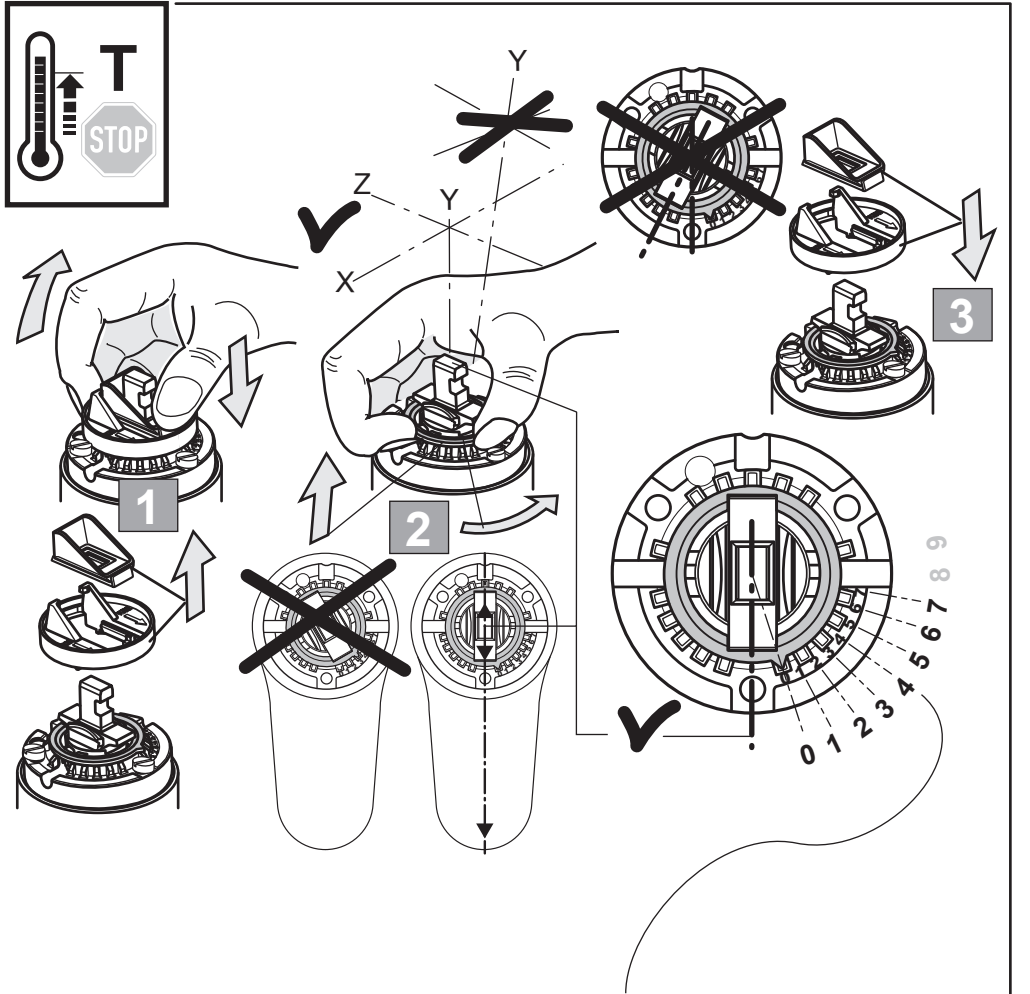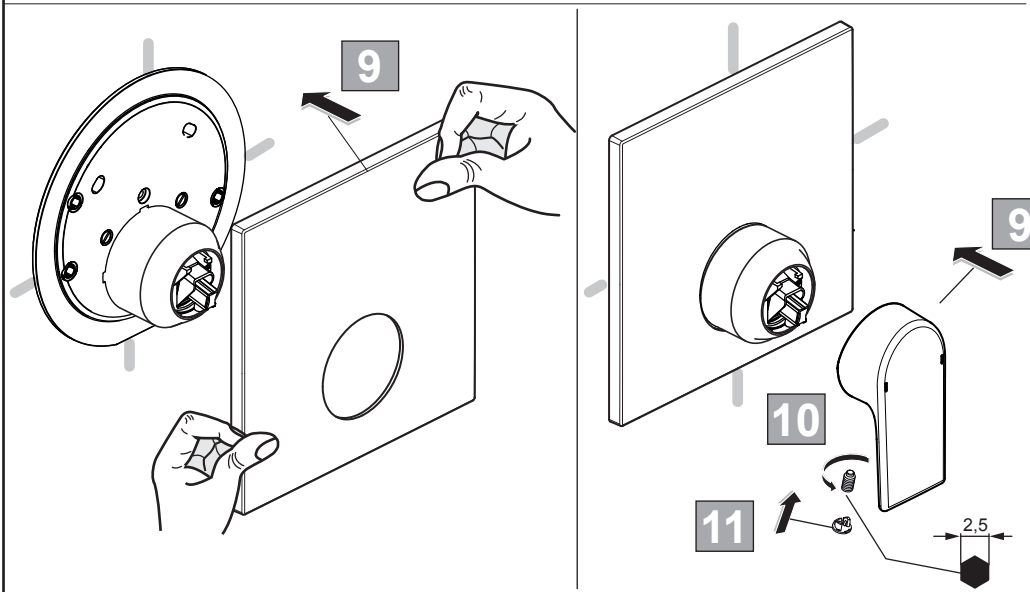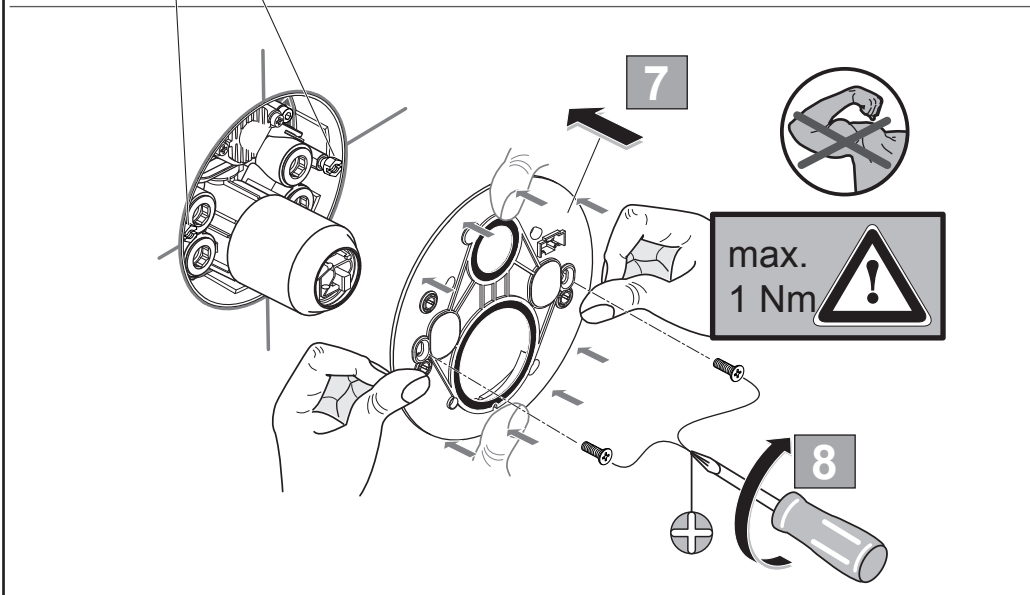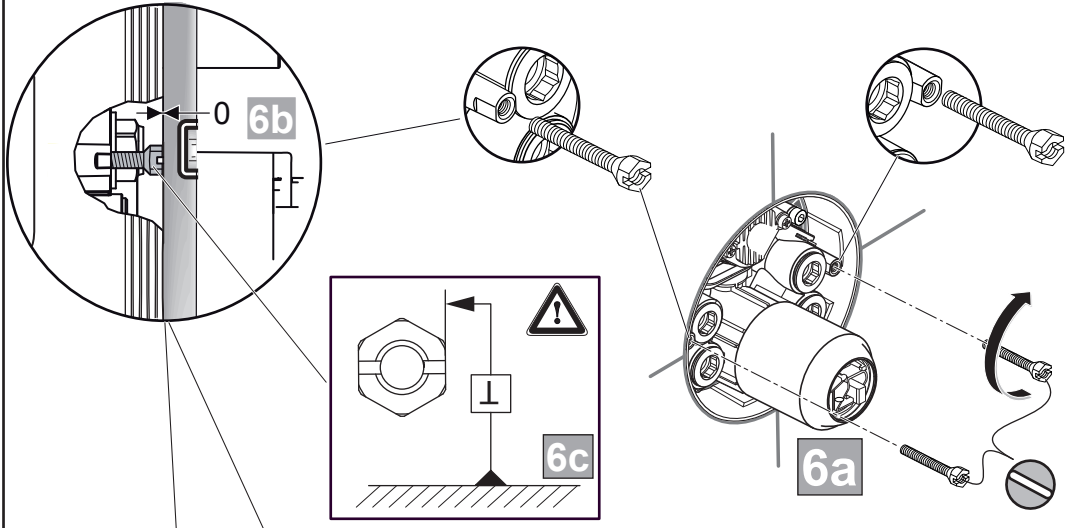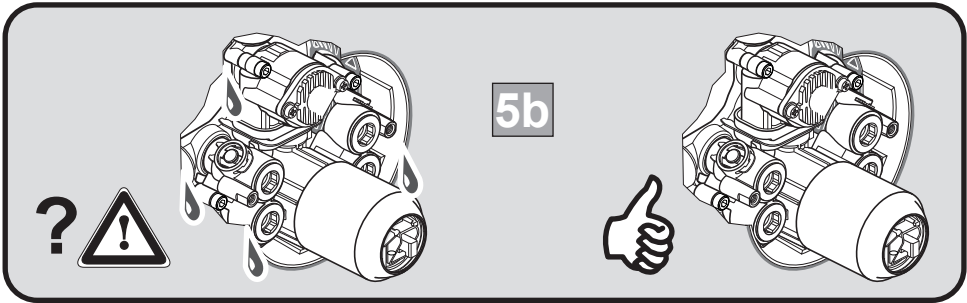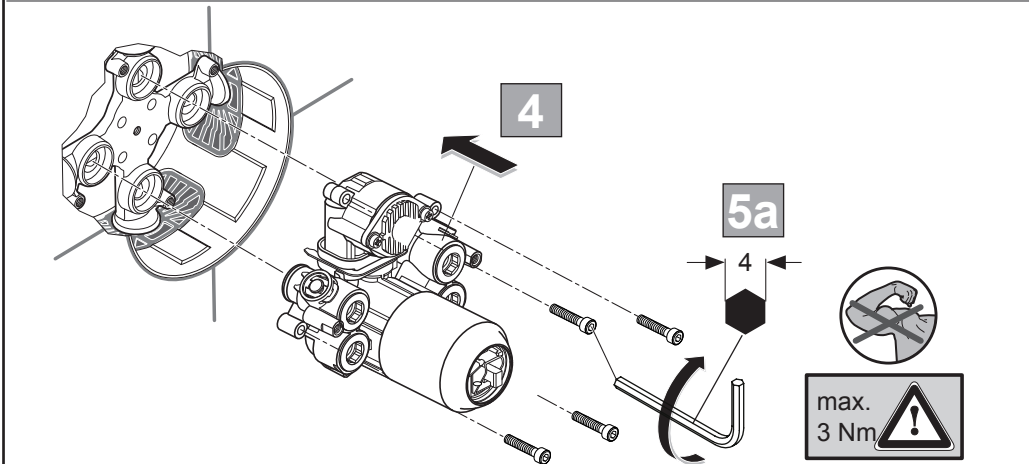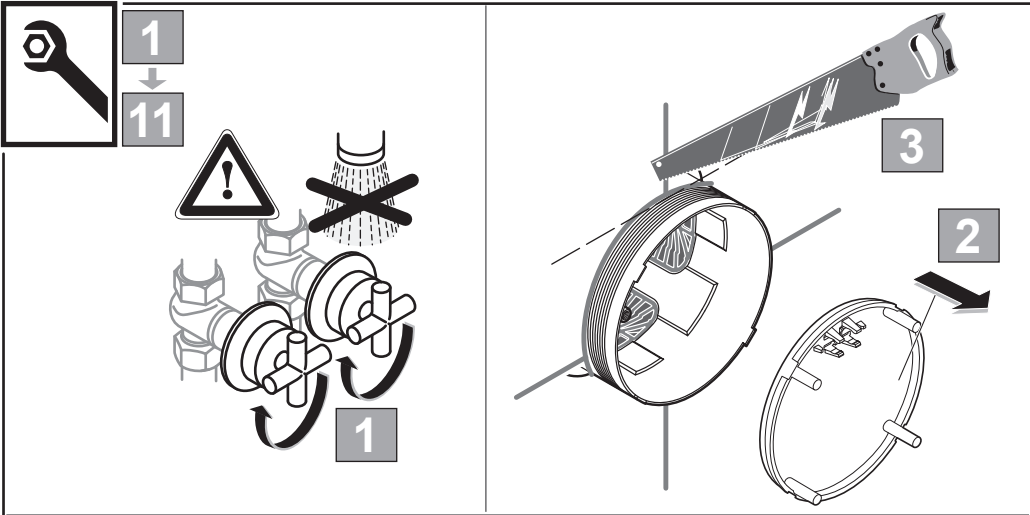

|         |      |      | 0    | 1    | 2    | 3    | 4    | 5    | 6  | 7    | 8    | 9    |
|---------|------|------|------|------|------|------|------|------|----|------|------|------|
|         |      |      | °C   | °C   | °C   | °C   | °C   | °C   | °C | °C   | °C   | °C   |
| 0,3 MPa | 50°C | 16°C | 49,5 | 49,5 | 48   | 46   | 42,5 | 41   | 37 | 33,5 | 31   | 28   |
| 3 bar   | 65°C | 16°C | 65   | 65   | 63,5 | 60,5 | 57   | 53,5 | 49 | 44,5 | 39   | 34,5 |
|         | 81°C | 16°C | 81   | 81   | 78,5 | 73   | 69   | 63,5 | 56 | 49   | 42,5 | 36   |



|  |   |     |  |         |  |    |  |  |       |         |
|--|---|-----|--|---------|--|----|--|--|-------|---------|
|  | P | bar |  | MAX. 10 |  | 5  |  |  | Q     | (3 bar) |
|  | T | °C  |  | MAX. 80 |  | 65 |  |  | l/min | 23      |